Project _____

Item _____

Quantity _____

CSI Section 11400

Delfield

Specification Line

Self-Contained Sliding Door Shallow Reach-In Refrigerator

MODELS

❑ **SSR2S-SLS**	2 section stainless interior sliding solid full height doors	❑ **SAR2S-SLS**	2 section aluminum interior sliding solid full height doors
❑ **SSR2S-SLSH**	2 section stainless interior sliding solid half height doors	❑ **SAR2S-SLSH**	2 section aluminum interior sliding solid half height doors
❑ **SSR2S-SLG**	2 section stainless interior sliding glass full height doors	❑ **SAR2S-SLG**	2 section aluminum interior sliding glass full height doors
❑ **SSR2S-SLGH**	2 section stainless interior sliding glass half height doors	❑ **SAR2S-SLGH**	2 section aluminum interior sliding glass half height doors

SSR2S-SLG

STANDARD FEATURES

- Stainless steel interior and exterior (SS)
- Stainless steel exterior, aluminum interior (SA)
- Exterior digital thermometer
- Easy to use electronic control
- Three chrome plated wire shelves per section
- 10′ attached cord and plug standard on 115V units
- 6″ adjustable stainless steel legs
- Energy savings door heater switch
- Flourescent lights with on/off switch (Glass door units only)
- Two year parts & labor warranty

OPTIONS AND ACCESSORIES

- ❑ Additional shelves
- ❑ Tray slides
- ❑ Stainless steel back
- ❑ Laminate on front, sides and back
- ❑ Bottom mount electrical
- ❑ Stainless steel banking strip
- ❑ Heat shield end
- ❑ Stainless steel kick plate
- ❑ Laminate kick plate
- ❑ 4″ stainless steel utility base
- ❑ Alarm control display
- ❑ 220-50-1 electrical
- ❑ 220-60-1 electrical
- ❑ Security package

SPECIFICATIONS

Exterior: Cabinet exterior sides, front and shroud shall be 22-gauge, corrosion resistant stainless steel. Upper shroud shall be hinged, with stay-open feature to provide easy access to refrigeration system.

Interior: Cabinet interior shall be 22-gauge, corrosion resistant stainless steel (SS models) or heavy gauge aluminum (SA models). Bottom and top surfaces are die stamped to provide radius corners and recessed floor. Three chrome plated wire shelves are provided per section. Shelves rest on clips which are adjustable in 1″ increments on stainless steel pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. An air duct is mounted to the ceiling assuring low velocity, even air movement throughout the cabinet interior.

Doors:
Solid Sliding. Exterior and interior shall be 22-gauge corrosion resistant stainless steel.

Glass Sliding. Double thermopane glass set in high impact black plastic frame.

Doors are set in tracks for easy movement. Spring action assures self closing. Gasket seals both ends of doors. Doors are removable for cleaning.

Refrigeration system: All components are mounted to the exterior cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between 27˚F and 40˚F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve.

System is controlled using Delfield's ACT-Advanced Control Technology electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption.

Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Electrical: Standard electrical connections shall be 115V, 60Hz, single phase. A 10′ cord and plug is supplied attached to a junction box mounted on the exterior top of the cabinet.

Delfield
980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com
Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com

Approval _____

Date _____

SPECIFICATION LINE: SELF-CONTAINED SLIDING DOOR SHALLOW REACH-IN REFRIGERATOR

Model #_____
CSI Section 11400

Specification Line: Self-contained sliding door shallow reach-in refrigerator



PLAN VIEW
SSR2S-SLS, SAR2S-SLS



PLAN VIEW
SSR2S-SLSH, SAR2S-SLSH



PLAN VIEW
SSR2S-SLG, SAR2S-SLG



PLAN VIEW
SSR2S-SLGH, SAR2S-SLGH

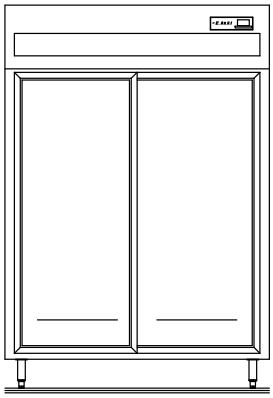

ELEVATION VIEW
SSR2S-SLS, SAR2S-SLS

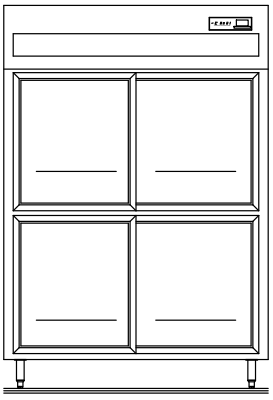

ELEVATION VIEW
SSR2S-SLSH, SAR2S-SLSH

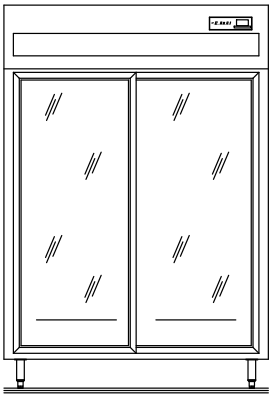

ELEVATION VIEW
SSR2S-SLG, SAR2S-SLG

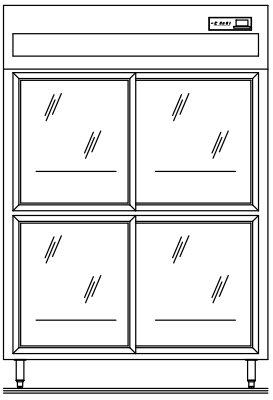

ELEVATION VIEW
SSR2S-SLGH, SAR2S-SLGH

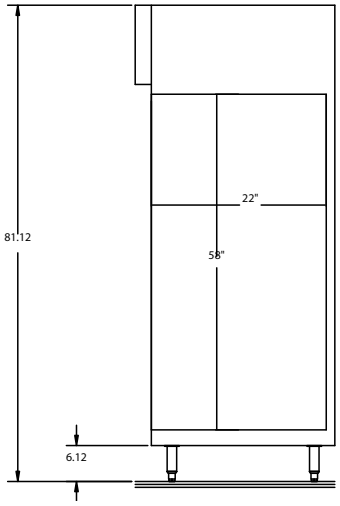

END SECTION VIEW
ALL MODELS

Mechanical Data

MODEL NUMBER	VOLTAGE	AMPS	STORAGE	SHELVES SQ.FT.	NO. OF SHELVES	UNIT H.P.	BTU/HR CAB LOAD	BTU/HR SYSTEM CAP	SHIP WEIGHT	NEMA PLUG
SSR2S-SLS, SAR2S-SLS, SSR2S-SLSH, SAR2S-SLSH	115	11.2	37.96	27.54	6	1/3	1853	2801	670	5/15P
SSR2S-SLG, SAR2S-SLG, SSR2S-SLGH, SAR2S-SLGH	115	11.2	37.96	27.54	6	1/3	1853	2801	670	5/15P

980 S. Isabella Road
Mt. Pleasant, MI 48858
www.delfield.com

Phone: 800-733-8948
Fax: 800-669-0619
Email: info@delfield.com

Printed in the USA.
09/06
DSSSR2SSL

Delfield reserves the right to make changes in design or specifications without prior notice.